






AUTOMATED EXTERIOR SCREENS - 120VAC DRIVE

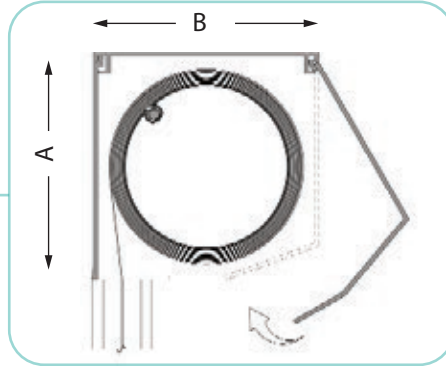


TECHNICAL CHARACTERISTICS

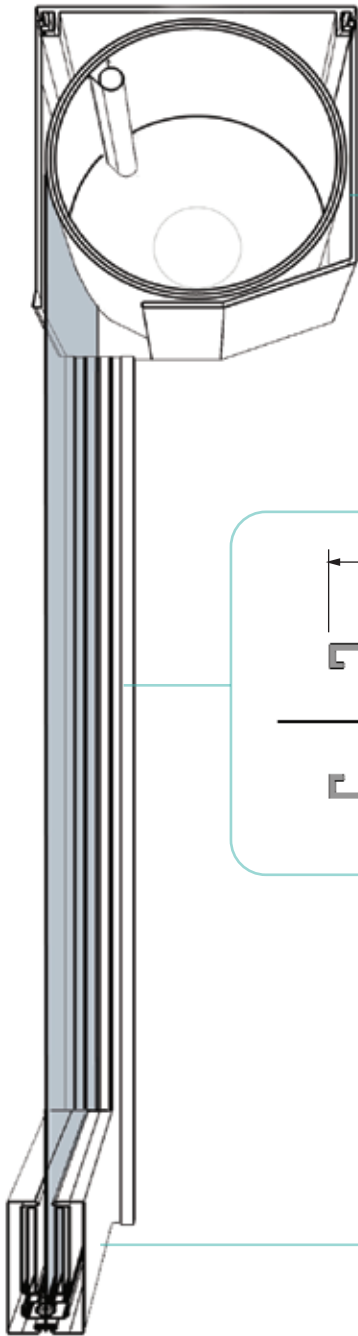

Aluminum cassette available in
A x B = 4" x 4" or A x B = 5" x 5"
Removable front closure to allow for fabric
and shade maintenance.
Durable Aluminum alloy side brackets

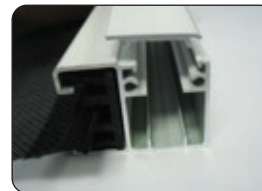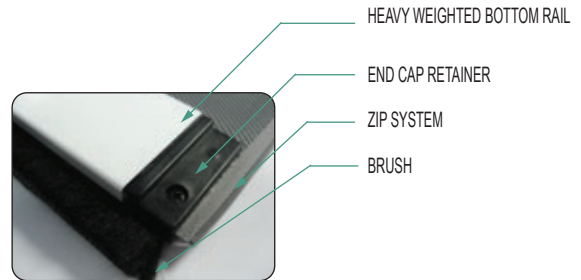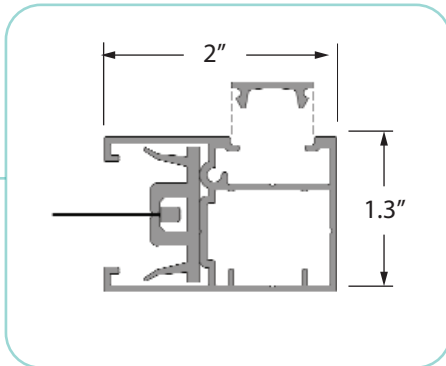

Aluminum side track with plastic zip
retainer system and vertical guides
integrated inside channel.
Can be exposed (surface) or recessed mount.

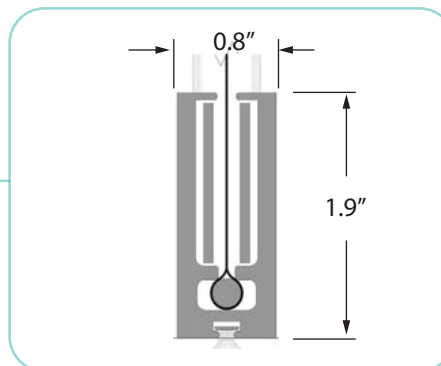

Heavy weighted aluminum bottom bar to assist
fabric tension and improved closure to ground.
Fabric is ultrasonically welded to provide extra
reinforcement.
Numerous fabrics and screens to choose from.

AVAILABLE IN UP TO 20'X20'. SIZE LIMITATIONS APPLY

TECHNICAL CHARACTERISTICS

- Wind resistance rated for up to 80 mph.
- Available in widths up to 240" (20').
- Available in drops up to 216" (18'), measured from the top of the cassette box to the bottom of the hem/weight bar. Max drops not available in all fabrics
- Powder coated aluminum hardware available in white, desert sand and brown
- Unit can be surface or recessed mounted
- Motorized unit with Somfy Altus RTS motor, full electronics are available. UL listed, 120 VAC/60Hz, Somfy Altus RTS (radio controlled) AC motor, 35Nm, 20 RPM, 2.5 amps or as specified per application by the shading supplier.
- Heavy duty 78mm roller tube
- 5" x 5" and 4" x 4" or custom aluminum cassette box with aluminum end caps
- Optional "Open roll-no cassette" for recessed applications
- Wide selection available from several solar shading fabrics, insect screen or solid acrylic fabric for full privacy
- Hem/weight bar includes a 1/2" deep nylon brush to seal to surface
- Standard seam placement will be as high as possible or seam placement is available. Seam placement is measured from the bottom of the hem/weight bar
- Retention zip are ultrasonically welded to the side of fabric for superior strength and added durability
- Provides the same solar protection benefits of typical exterior screens with an added level of security
- Limited 5 Year Warranty

APPLICATIONS

